



WALLWASHER

High Bay LED lights are high-performance luminaires specifically designed for large indoor spaces with high ceilings, typically ranging from 6 to 20 meters . They provide powerful, uniform illumination with excellent energy efficiency and long lifespan.

Applications:



Facade



Landscape




MIKANO

Powered by
 **EG.Light**

Electrical features

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range	24-36
LED Chip Brand	Lumiled - Osram
Light Source Type:	SMD2835
Luminous Efficacy	100 lm/w
CRI:	80
CCT:	3000K-4000K-6500K
Driver Type:	Constant Current
Power Factor:	0.6
Driver Brand	Philips - Eaglerise
Lifetime:	50.000hrs


Dimensions

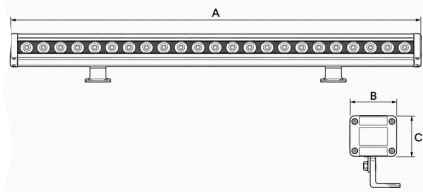

Mechanical Characteristics

Body Material:	Aluminum
Diffuser Material:	PC-Glass
Beam Angle:	45
Installation:	Suspended
Body Color:	Black-Grey
Diffuser Color:	white

LID Diagram



Code	Wattage	Dimensions(mm)			Total Lumen
		A	B	C	
MLW1-24	24	995	50	60	1920
MLW1-36	36	995	50	60	2880

Dimensions tolerance +- 1
Available 3000k and 4000k upon request