



COB DOWNLIGHT

A modern downlight designed to deliver focused, comfortable illumination with a clean and refined look, enhancing every interior with balanced brightness and timeless elegance.

Applications:



Commercial



Residential



Education facilities




Hotels



Electrical features :

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range:	9-40
LED Chip Brand:	Cree-Philips
Light Source Type:	COB
Luminous Efficacy	100 lm/w
CRI:	90
CCT:	3000k-4000k-6500k
Driver Type:	Constant Current
Power Factor:	0.9
Driver brand:	Lifud-Philips
Lifetime:	50.000hrs


Dimensions:

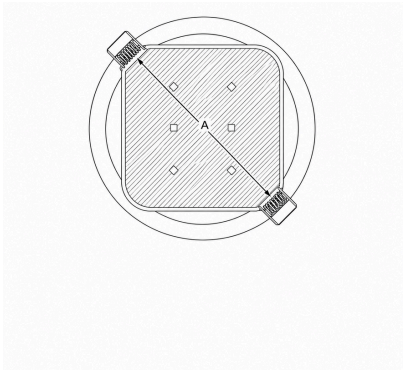

Mechanical Characteristics:

Body Material:	Die Cast Aluminum
Diffuser Material:	Opal PC
Beam Angle:	60
Ingress Protection:	44
IK:	05
Installation:	Recessed

LID Diagram



Code	Wattage (W)	Dimensions (mm)	Total lumen
MDC1-9	9	75	900
MDC1-12	12	95	1200
MDC1-15	15	115	1500
MDC1-20	20	145	2000
MDC1-25	25	165	2500
MDC1-40	40	195	4000

Note: Dimensions tolerance +- 10