



FLOOD LIGHT

Built with a durable die-cast aluminum housing and high-quality optical lenses, LED flood lights provide excellent heat dissipation and uniform light distribution, feature an IP66 protection rating, making them resistant to dust, rain, and harsh environmental conditions.

Applications:




MIKANO

Powered by
EG.Light

Electrical features

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range	100-300
LED Chip Brand :	Lumiled-Philips
Light Source Type:	SMD
Luminous Efficacy	135 lm/w
CRI:	80
CCT:	3000K-6500K
Driver Type:	Constant Current
Power Factor:	0.95
Driver Brand:	Done-Philips
Lifetime:	50.000hrs


Dimensions

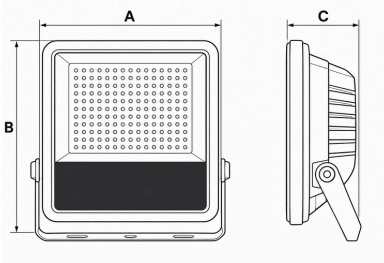

Mechanical Characteristics

Body Material:	Die Cast Aluminum
Diffuser Material:	PC-Glass
Beam Angle:	120
Installation:	Suspended
Body Color:	Black-Grey
Diffuser Color:	white

LID Diagram



Code	Wattage	Dimensions(mm)			CCT(K)	Total lumen
		A	B	C		
MFS1-100	100	215	270	60	6500	13500
MFS1-150	150	215	270	60	6500	20250
MFS1-200	200	305	340	75	6500	27000
MFS1-300	300	305	340	75	6500	40500