

INDOOR



COB SHOWER

A modern downlight designed to deliver focused, comfortable illumination with a clean and refined look, enhancing every interior with balanced brightness and timeless elegance.

Applications:



Commercial



Residential



Education facilities




MIKANO

Powered by
 **EG.Light**

Electrical features :

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range :	15
LED Chip Brand :	Philips-Bridgelux-Cree
Light Source Type:	SMD COB
Luminous Efficacy	100 lm/w
CRI:	90
CCT:	3000k-4000k-6500k
Driver Type	Constant Current
Power Factor:	0.9
Driver brand	Philips-Lifud
Lifetime:	50.000hrs


Dimensions:

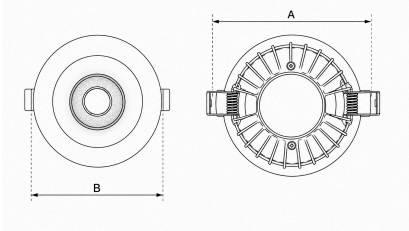

Mechanical Characteristics:

Body Material:	Die Cast Aluminum
Diffuser Material:	PC-Glass
Beam Angle:	60-90
Ingress Protection:	44
IK:	03
Installation:	Recessed

LID Diagram

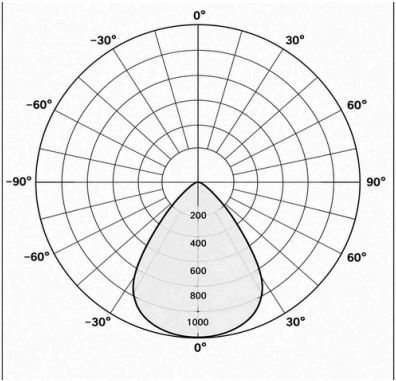

Code	Wattage (W)	Dimensions(mm)		Total lumen
		A	B	
MDC2-15	15	70	85	1500

Note: Dimensions tolerance +- 10