

INDOOR



TRI-PROOF



A tough, waterproof, and dustproof LED luminaire built to give bright illumination in harsh workspaces.

Applications:



Commercial



Residential



Education facilities



Garage




MIKANO

Powered by
 **EG.Light**

Electrical features :

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range:	27-40
LED Chip brand	Module SMD2835
Light Source Type:	Philips-Osram
Luminous Efficacy	176lm/w
CRI:	80
CCT:	3000k-4000k-6500k
Driver Type:	Constant Current
Power Factor:	0.95
Driver brand:	Eaglerise-Philips
Lifetime:	50.000hrs


Dimensions:

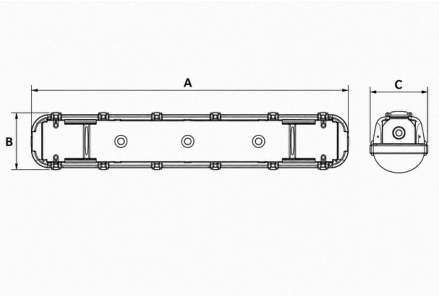

Mechanical Characteristics:

Body Material:	PC
Diffuser Material:	Opal PC
Beam Angle:	120
Ingress Protection:	66
IK:	08
Installation:	Suspended-Surfaced

LID Diagram

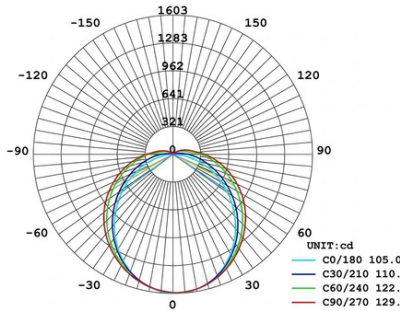

Code	Power	Dimensions(mm)			Total Lumen
		A	B	C	
MT1-40	40	1200	85	80	7040
MT1-27	27	1200	85	80	4752

Dimensions tolerance +- 1

Available 4000k upon request