

OUTDOOR



MULLER FLOOD LIGHT

Built with a durable die-cast aluminum housing and high-quality optical lenses, LED flood lights provide excellent heat dissipation and uniform light distribution ,feature an IP66 protection rating, making them resistant to dust, rain, and harsh environmental conditions.

Applications:



Stadiums



Public Infrastructure



Highways




MIKANO | Powered by **EG.Light**

Electrical Features

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range :	400-1000
LED Chip brand:	lumiled-philips
Light Source Type:	LED Module
Luminous Efficacy	150-170 lm/w
CRI:	80
CCT:	6500K
Driver Type:	Constant Current
Power Factor:	0.95
Driver Brand:	Philips-Meanwell-Xchly
Lifetime:	50.000hrs


Dimensions

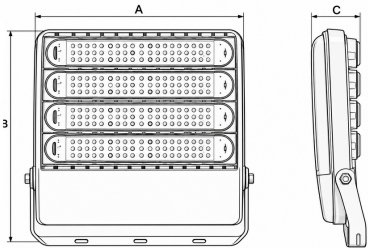

Mechanical Characteristics

Body Material:	Die Cast Aluminum
Diffuser Material:	PC
Beam Angle:	90
Installation:	Wall mounted - Pole mounted - High mast mounted
Body Color:	Black-Grey
Diffuser Color:	white

LID Diagram



Code	Wattage	Dimensions(mm)			Total lumen
		A	B	C	
MFM2-400	400	540	600	70	90000-102000
MFM2-600	600	540	600	70	90000-102000