



HIGHBAY

High Bay LED lights are high-performance luminaires specifically designed for large indoor spaces with high ceilings, typically ranging from 6 to 20 meters . They provide powerful, uniform illumination with excellent energy efficiency and long lifespan.

Applications:



Warehouse



industrial



Electrical features


Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range :	100-200
LED Chip Brand:	Philips-Lumiled
Light Source Type:	SMD
Luminous Efficacy	135 lm/w
CRI:	80
CCT:	3000-4000-6500K
Driver Type:	Constant Current
Power Factor:	0.95
Driver Brand:	Philips-Lifud
Lifetime:	50.000hrs

Mechanical Characteristics


Body Material:	Die Cast Aluminum
Diffuser Material:	PC-Glass
Beam Angle:	120
Installation:	Suspended
Body Color:	black
Diffuser Color:	white

Code	Wattage (W)	Dimensions(mm)		Total Lumen
		D	H	
MH1-100	100	280	68	13500
MH1-150	150	280	68	20250
MH1-200	200	320	68	27000

Dimensions

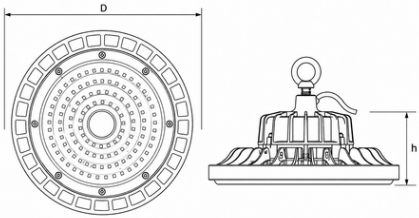

LID Diagram



Dimensions tolerance +- 1

Available 3000k and 4000k upon request