



Backlit 60*60

Designed for modern offices, healthcare facilities, and commercial spaces, this 60×60 cm backlit LED panel delivers smooth, visual comfort with maximum energy efficiency.

Applications:



Commercial



Residential



Education facilities




Office



Electrical features :

Input Voltage:	220-240VAC
Frequency:	50/60HZ
Power Range:	40-44
LED Chip brand	OSRAM-PHILIPS
Light Source Type:	Led Module
Luminous Efficacy	110-130 lm/w
CRI:	80
CCT:	3000k-4000k-6500k
Driver Type	Constant Current
Power Factor:	0.9
Driver brand	OSRAM-VS-PHILIPS-DONE
Lifetime:	50.000hrs


Dimensions:

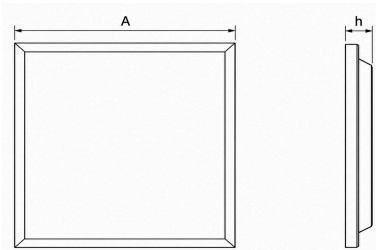

Mechanical Characteristics:

Body Material:	Aluminum
Diffuser Material:	Milky Opal PC
Beam Angle:	120
Ingress Protection:	40-44-54
IK:	02
Installation:	Recessed-Surfaced

LID Diagram



Code	Wattage (W)	Dimension(mm)		Total lumen
		A	h	
MDS2-40	40	595	30	4800
MDS2-42	42	595	30	5040
MDS2-44	44	595	30	5280

Dimensions tolerance +- 10